

# Front and back rack mount Picturall Series Media Servers (Compacts)


Two rack kits are supplied with the device:

- Front ears (Ref: 180469)
- Rear rack mount rail (Ref: 180489)

**SCREWS SUPPLIED**  
16 x M4x10

*(Compatible with the following devices: Picturall Twin Compact, Picturall Quad Compact)*

**CAUTION!**  
Mounting using only the front rack ears is sufficient for fixed installations. Additional support, such as the rear rack support or slide rails, is required for mobile applications, and recommended for all.

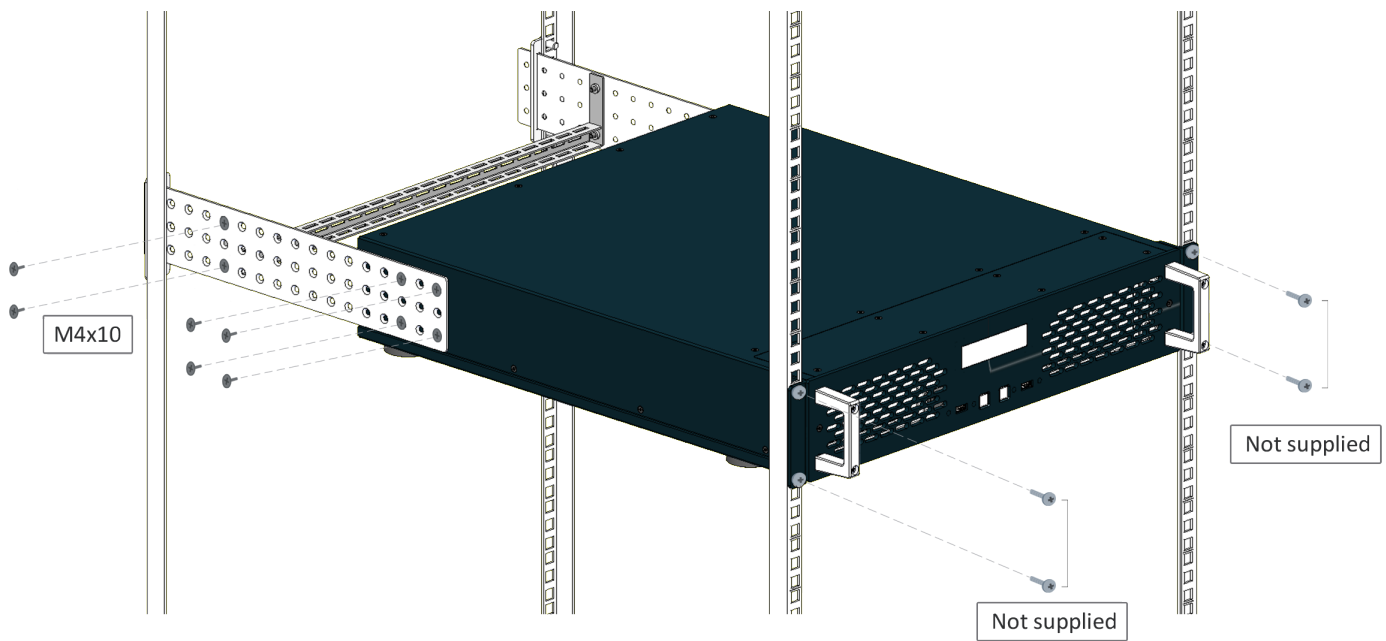

## To install the front ears:

1. Screw the ears on each side of the device using two M4x10 screws per side (M4x10 screws included in the package).
2. Place the unit into the rack and screw the ears on the rack (screws not provided).


### Analog Way Worldwide

Europe, Middle East & Africa: +33 (0)1 81 89 08 60

The Americas: +1 212 269 1902

Asia Pacific: +852 6882 7140

[www.analogway.com](http://www.analogway.com)

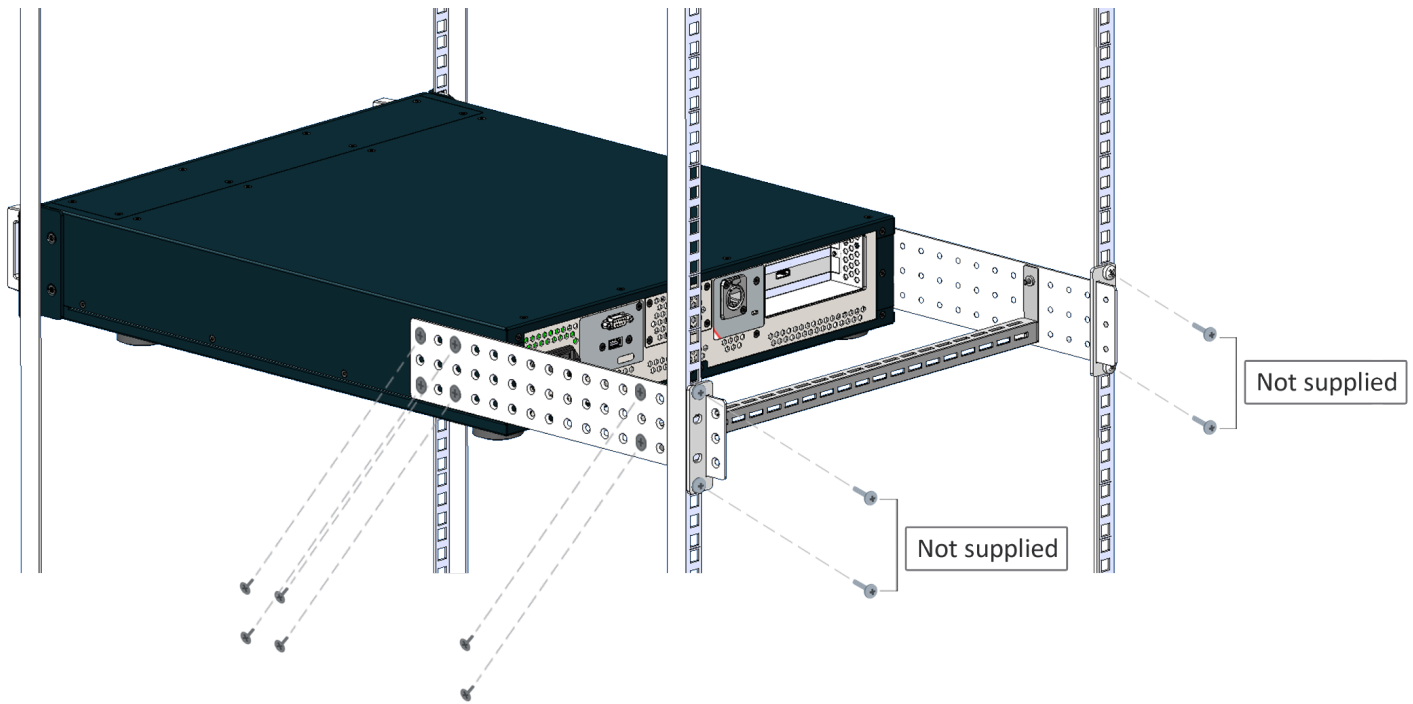

### To install the rear rack rail:

Once the unit is installed into the rack.

1. Locate the four holes on each side of the device where the screws can be put into.
2. Use four M4x10 screws to fix the rear rail on each side of the device.
3. To screw the rail to the rack, screw two screws on each side of the rail (screws not provided).
4. Install the lacing bar between the two rails using two M4x10 screws. Choose the right distance according to the cable position.
5. If needed, use tie cables to maintain the video cables on this lacing bar.

### CAUTION!

Make sure to provide an adequate ventilation for the device. When installing it into the rack, make sure no ventilation holes are blocked. The air intakes by the front panel and exhausts by the back of the unit.

Make sure that the rails will pass through the back ears by the minimum of 15mm/ 0,59 inch