


# NeXtage 08 - 4K

Ref. NXT0802-4K



Compact and cost-effective 4K seamless switcher. Perfect for live events and fixed installations demanding ease of use, flexibility and high-end video processing.

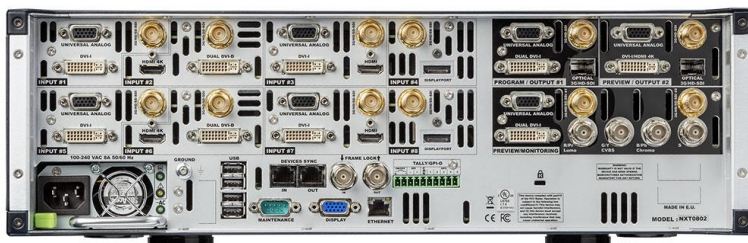

## Compact and Reliable

NeXtage is the most compact and affordable chassis in the LiveCore™ family. Designed around an extremely robust and reliable hardware platform, and with the same performance and core features as its larger siblings, the NeXtage 08 - 4K is ideal for professional live presentations and integrations that do not require the full capacity of the more powerful LiveCore™ video processors.

## Nimble and Powerful

Like all the products of the LiveCore™ series, the NeXtage 08 - 4K offers flexibility through its support of different video standards (custom formats included) and its versatile connectivity. Featuring eight inputs, two PGM outputs, a dedicated Multiviewer output and two true-seamless scaled layers per output (on top of the live native background), the NeXtage 08 - 4K will adapt to a large variety of display configurations such as soft-edge projection, LED image wall or multi-screen applications.

## Simple and Creative

The NeXtage 08 - 4K offers many advanced processing features that will allow you to create amazing live shows and impressive fixed installation: Cut and fill, alpha-channel support, Chroma and Luma key, true seamless switching on all layers as well as an intuitive web based user interface which will help unleash all your creative potential and get the best out of your LiveCore™ video processors.



Up to  
**8**  
inputs

Up to  
**2**  
outputs

**3U**  
size

Up to  
**4K**  
30Hz

  
Cut & Fill

  
Rotation

### NeXtage 08 - 4K at a glance

- ▶ Versatile connectivity (8 seamless inputs and 28 input plugs)
- ▶ State-of-the-art, real-time 10 bit 4:4:4 processing
- ▶ True-seamless switching technology
- ▶ Advanced video effects for impressive visual shows
- ▶ User-friendly and intuitive Web-based graphic user interface
- ▶ Heavy-duty design for optimized uptimes in mission-critical use

	NeXtage 08 - 4K	NeXtage 16 - 4K
Layers per output	2	4

## KEY FEATURES

LiveCore™ platform

Ruggedized and heavy-duty design

Versatile connectivity (8 active inputs, 28 total input plugs)

Input formats up to Dual Link 60hz 4:4:4 or 4k30hz 4:4:4 - supports Quad HD sources

Output formats up to 4K30Hz 4:4:4

Seamless crossfade on all layers, on all 8 sources

Rotation capability on all outputs

Independent output rate

Flying layer movement with programmable paths

Multiple layer transition options

Independent preview/mosaic/monitoring output

Customization of monitoring layouts (8 presets)

Intuitive drag and drop Web based GUI, cross platform compatible

Live video thumbnails shown on GUI

Collaborative architecture (up to 5 simultaneous operators)

Single screen memories and master memories to easily recall looks on all your screens

Creative display configurations (mixer, hard-edge, soft-edge)

Custom output formats for non-standard display applications (10 memories)

Custom Canvas mode allows you to place outputs anyway on your "video canvas" for special LED wall applications

Area of Interest option to customize active areas of outputs

Confidence monitor available for unused outputs

Native background using still images or live sources

Still images support alpha-channels for transparent background

Cut and Fill (using two sources or a source and a still image)

49dB average noise at 1 meter when ambient temp is less than 32°C/90°F (quiet)

Associative modularity (create a large system of LiveCore™ units all controlled from a Vertige™ or RCU)

Sequencer for creating programmable timelines

Remote services and maintenance

HDCP compliant

Swappable power supply

### Dimension (in Rack Units - RU)

- ▶ 3RU

### Dimensions (without rack ears and rear rack mount)

- ▶ W 17.32" x H 5.23" x D 20.47"
- ▶ L 440 mm x H 133 mm x P 520 mm

### Dimensions (with handles)

- ▶ W 19" x H 5.23" x D 21.41"
- ▶ L 482.6 mm x H 133 mm x P 544 mm

### Weight without accessories

- ▶ 14.8 kg / 32.63 lbs

### Shipping weight accessories included

- ▶ 20.9 kg / 46.10 lbs

### Operating conditions

- ▶ Temperature: 0 to 40°C (32 to 104°F)
- ▶ Humidity: 10% to 80%, non-condensing

### Noise (@1,6m height @25°C)

- ▶ Front: 49 DBa@1m
- ▶ Rear: 50 DBa@1m

### Thermal dissipation

- ▶ 683 BTU/hr

### Warranty

3-year warranty on parts and labor back to factory

### Power Supply

- ▶ 100-240 VAC 50/60Hz 8A swappable
- ▶ Max consumption: 200 W

### Safety Compliance

- ▶ IEC/UL/EN 60950-1, CSA22.2#60950-1, UL Listed (US & Canada) File:E359143

### Supplied with

- ▶ 1 x Power supply cord
- ▶ 1 x Web-based Remote Control Software
- ▶ 1 x Rackmount kit
- ▶ 1 x Ethernet cross cable (for device control)
- ▶ 1 x MCO 10 pin connector
- ▶ 1 x User manual (PDF)\*
- ▶ 1 x Quick start guide including safety instructions\*

## INPUTS

8 active inputs, 28 total input plugs

4x HDMI (2x HDMI up to 4k30hz included)

2x DisplayPort (up to 4k30hz)

6x DVI-I (2x DVI Dual-Link up to 2560x1600 included)

8x 3G/HD/SD-SDI

8x Universal Analog (4x HD15 & 4x DVI-A)

## OUTPUTS

2 outputs with 5 plugs per output

4x Universal Analog (2x HD15 & 2x DVI-A)

2x 3G/HD/SD-SDI

1x DVI-I Dual-Link up to 2560x1600 (output #1)

1x DVI/HDMI 4K up to 4k30hz 4:4:4 (output #2)

2x SFP (Optical for SDI Fiber transmission)

## MONITORING OUTPUT

2x Universal Analog (HD15 & DVI-A)

1x DVI-I

2x 3G/HD/SD-SDI

1x RGBs/RGsB/RGB/YPrBr/YC/comp analog output

Customizable labels

Up to 8 widgets

## LAYERS

2 True-Seamless scaled layers per output

1 native background layer per output

Advance layer management

## TRANSITIONS & EFFECTS

True A/B Mix

Borders: Edge, Smooth, Smooth Edge, Shadow...

Transitions: Cut, Fade, Slide, Wipe, Circle, Stretch, Depth, Flying window

Layer effects: Background Cut, Transparency, Luma/Chroma Key, DSK, H&V Flip, Cut and Fill

Colors effects: B&W, Negative, Sepia and Solarize

## FRAMES & LOGOS

Up to 100 frame/logo memories - Fully resizable

Download/upload via Web RCS

Capture from live inputs

## CONTROL

Web RCS: On-board intuitive web based user interface

Vertige™: Premium remote controller

RCU: Rack mountable master control unit

Shot Box<sup>2</sup>/Control Box<sup>2</sup>: Cost effective presets control solutions

TCP protocol and AMX/Crestron drivers

AW VideoCompositor: Drag & drop Crestron® GUI


## OTHER FEATURES

Tally/GPI-O

Independent Frame Lock input and output loop

## EXPANDABILITY

Several chassis can be synchronized and controlled from a Vertige™ to create huge video canvases

 Specifications subject to change without prior notice

NXT0802-4K\_EN-10/17/2018